


CLEAN, CLEAR & ODOR-FREE SOLVE YOUR PROBLEM WATER

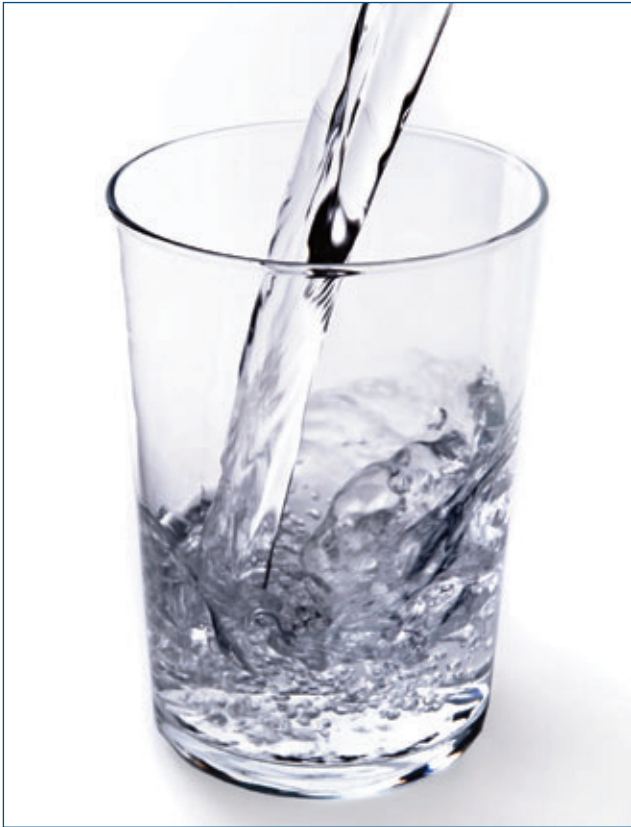

PROBLEM WATER IS NO PROBLEM

When you install a whole-house filter to take care of iron, sediment, bad tastes, stains, color and odors your problems disappear. Water the way you want it!

WHOLE-HOUSE FILTRATION

- | | |
|----------------------------|--|
| Taste & Odor | Remove chlorine and organics that make water taste & smell bad |
| Multi-Media | Eliminate suspended sand and silt that makes water cloudy |
| Neutralizing | Raise the pH of acidic water to neutralize corrosiveness to protect fixtures, pipes and appliances |
| Birm | Remove soluble or precipitated iron without the use of expensive or messy chemicals |
| Manganese Greensand | Iron, manganese and sulfur are oxidized into solids and trapped in the filter bed where they get flushed to the drain when the filter regenerates. |



IWT 165 FILTER SPECIFICATIONS



Features:

- Exclusive NSF Certified electronic control valve with reliable piston, seal and spacer technology
- Warranty – 10 Year on NSF Certified fibreglass tank; 5 years on valve
- User friendly LCD display shows time of day, remaining capacity and regeneration cycle in progress with 48 hour memory back-up
- Meter Immediate, Meter Delayed, Meter with Day Override and Calendar Clock regeneration modes
- Time-saving quick connect fittings on bypass and drain line for simple installation and service
- Unique bypass with an integrated space saving turbine meter and sample port on the inlet. One-piece design avoids meter jamming

Item #	Model	Media Cu Ft	Flow Rate USGPM			Iron Removal Capacity (ppm)	KMnO4 Regen (oz)	Mineral Tank Size	Pipe Size Inches	Ship Weight Lbs
			Service	Peak	Backwash					
Iron Filters – Manganese Greensand										
15030005	IWT165IF-75	0.75	3.0	4.0	3.5	4,500	2.0	8 x 44	3/4"	104
15030006	IWT165IF-100	1.0	3.0	5.0	4.0	6,000	4.0	9 x 48	3/4"	130
15030007	IWT165IF-150	1.5	4.0	8.0	5.0	9,000	6.0	10 x 54	3/4"	178
Iron Filters – Birm										
15050021	IWT165BM-75	0.75	3.0	4.0	3.5	-	-	8 x 44	3/4"	67
15050022	IWT165BM-100	1.0	3.0	5.0	4.0	-	-	9 x 48	3/4"	82
15050023	IWT165BM-150	1.5	4.0	8.0	5.0	-	-	10 x 54	3/4"	108
Taste & Odor Filters										
15050037	IWT165TO-75	0.75	4.0	5.0	3.5	-	-	8 x 44	3/4"	53
15050038	IWT165TO-100	1.0	4.0	6.0	4.0	-	-	9 x 48	3/4"	64
15050039	IWT165TO-150	1.5	5.0	7.0	5.0	-	-	10 x 54	3/4"	81
Neutralizing Filters										
15050029	IWT165NU-75	0.75	2.0	4.0	4.0	-	-	8 x 44	3/4"	104
15050030	IWT165NU-100	1.0	3.0	6.0	5.0	-	-	9 x 48	3/4"	130
15050031	IWT165NU-150	1.5	4.0	10.0	7.0	-	-	10 x 54	3/4"	180
Sediment Turbidity Multi-Media Filters										
15050033	IWT165MM-75	0.75	4.0	5.0	3.5	-	-	8 x 44	3/4"	97
15050034	IWT165MM-100	1.0	5.0	7.0	4.0	-	-	9 x 48	3/4"	123
15050035	IWT165MM-150	1.5	7.0	10.0	7.0	-	-	10 x 54	3/4"	169

- Voltage 12V/60Hz (120V to 12V wall mount transformer included)
- Pipe Size 3/4"
- Max Water Temp = 110°F (43°C)
- Max Operating Pressure = 100 PSIG (689 kPa)
- At stated service flow rates the pressure drop through these devices will not exceed 15 PSIG
- Do not use where microbiologically unsafe

Manufactured by:



Canature USA Inc. (Golden Valley, MN);
 Canature North America Inc.
 (Regina, SK; Kitchener, ON)
www.iwtwater.com

Your Local Water Professional:

Fisher's Supply
 659 SW 1st Ave
 Canby, OR 97013
 503-263-8557
www.fisherssupply.com